

HBQ-Z505 型智能物流车

HBQ-Z505 AUTOMATIC GUIDED VEHICLE

背驮滚筒式AGV Rotary drum type AGV

车身美观大方，坚固耐用。此款AGV采用磁条导引，可沿设定的路线自行行走，到达设定位置自动与产线周边的对接平台对接，实现物料在产线的自动上下料。广泛应用于汽车，线束，电子等行业。

HBQ-Z505 is an elegant and robust AGV which is guided by magnetic stripe. HBQ-Z505 move along with the route set for itself and perform load and unload of the materials when it arrive at the transfer performs. AGV has been used widely in the automotive, wire harness and electrics fields.


潜伏式AGV Latent type AGV

应用于非常狭窄且受限的空间，通过磁条导引，按照设定的路线自行行走。AGV行走到位台下，利用电动升降棒牵引或分离台车。潜伏式AGV操作简单，行走灵活，广泛应用于工厂车间物品的搬运。

This type of AGV is usually used in a narrow space and move automatically along with the specific routes set for AGV. When it arrives at the transport vehicle location, AGV will drive the transport vehicle or depart from the vehicle. Latent AGV is widely used for the transportations in various factory because of its easy operation and flexible move.

产品特点 Introduction

模块化设计	Modular design
自动装卸料	Automated loading and unloading of materials
双层避障保护	Double automated obstacle avoiding technology.
自动充电	Automated charging.
自动交接物料	Automated transition of materials
友好的人机交互界面	Friendly man-machine interaction interface

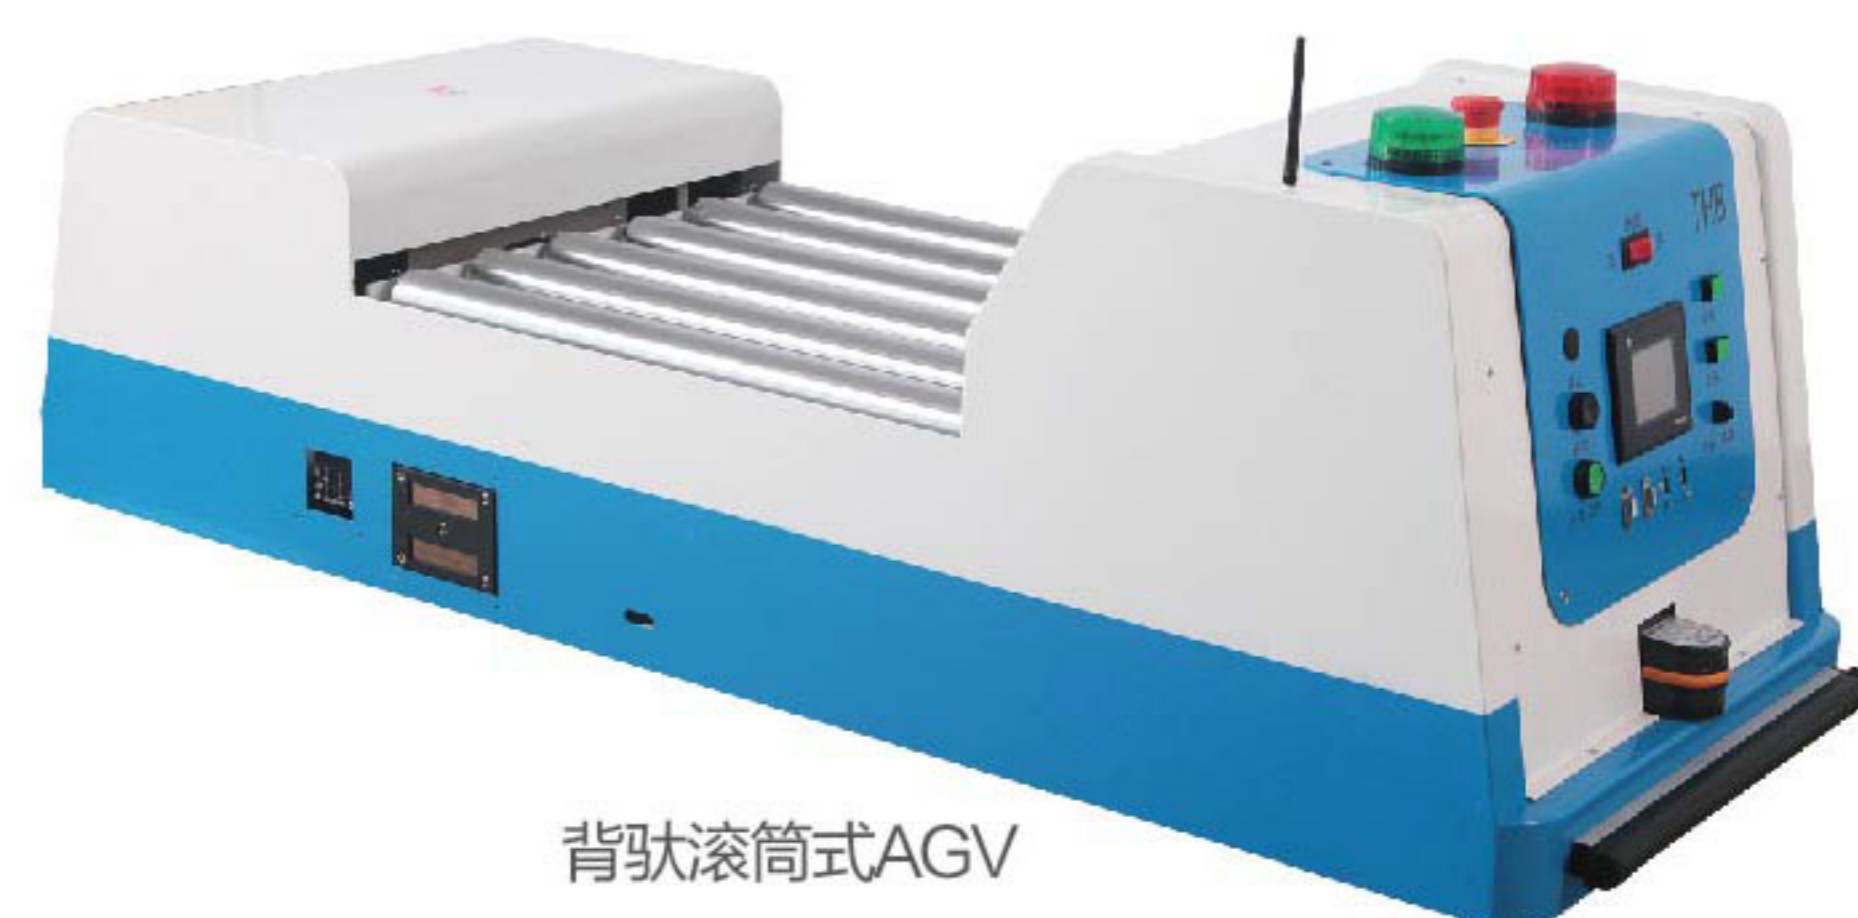

背驮滚筒式AGV



潜伏式AGV



充电站



对接平台

技术参数 Specifications

型号	背驮滚筒式AGV	型号	潜伏式AGV
电压	DC24V	电压	DC24V
功率	300W(Max)	功率	185W (max)
跨越台阶差	<6mm	跨越台阶差	<6mm
路面宽度	≥1800mm (双向运行)	路面宽度	≥1500mm(By the sizeof the AGV)
转弯半径	≥600mm	转弯半径	≥600mm
行驶速度	≤30m/min	行驶速度	≤60m/min
负载能力	500KG	负载能力	250KG
停止精度	±10mm	停止精度	±30mm
外形尺寸	L1500×W600×H550	外形尺寸	L1350×W380×H295